


UHDMWPE WOVEN WEBBINGS for SAIL INDUSTRY

Properties

- Stronger than steel
- Perfect abrasion resistance
- Floats on water
- Very high UV resistance
- Low elongation (7-9%)
- Not effected from salty water
- No mildew or fungi growth
- Suitable to work under constant loads

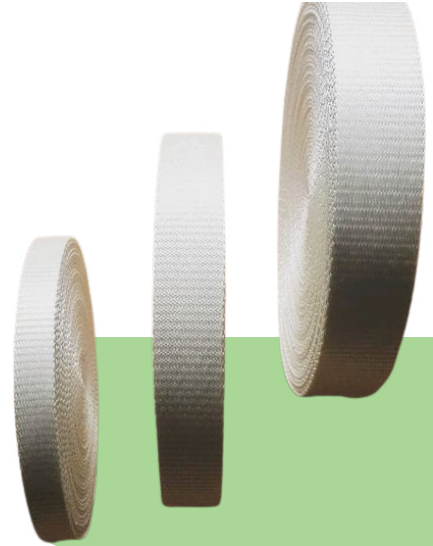

Main Usage Areas

Corner Rings On Sails & Sail Transport Systems



Flat Ropes For Reels



Technical Chart and Standard Product Range

Thickness-mm	Properties	Width-mm						
		15	20	25	30	35	40	60
1	Breaking Load-ton>	0,76		1,27	1,52		2,03	3,05
	Weight gr/m	7,65		12,75	15,3		20,4	30,6
1,5	Breaking Load-ton>	1,14		1,9	2,28		3,05	4,6
	Weight gr/m	11,48		19,13	22,95		30,6	46
2	Breaking Load-ton>	1,52	1,9	2,54	3,05	3,4	4,06	6,09
	Weight gr/m	15,3	19	25,5	30,6	41	41	61,2
2,2	Breaking Load-ton>					4,6		
	Weight gr/m					42,5		
	PACKAGING	50m/hank	50m/roll	50m/roll	50m/roll	50m/roll	50m/roll	50m/roll

- Items in **yellow** cells are stock items.
- Minimum order quantity for other items is 1000m
- Unlisted items can be produced on demand.